

## Flagg Planter (Seat or Trough version)

Before beginning assembly, please site the planter in your chosen location. If you wish to move the planter to another location at a future date we recommend disassembling the units, then reassembling in the new location.

### Seat Version:

#### Items Supplied

- Assembly instructions
- 2 x planter boxes
- 1 x seat
- 6 x nuts, washers and bolts

#### Tools Required (not supplied)

- 13mm Wrench

#### Instructions

1. Place the two planters 1m apart with the pre-drilled holes on the sides of the planters facing each other. (Fig. 1a)
2. Lower the seat into position (Fig. 1b) and tap the six bolts provided through the pre-drilled holes with a soft mallet. Place the six washers and nuts onto the bolts and tighten using a wrench. (Fig. 1c)

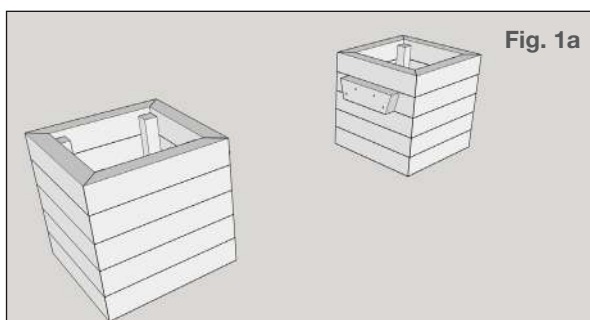


Fig. 1a

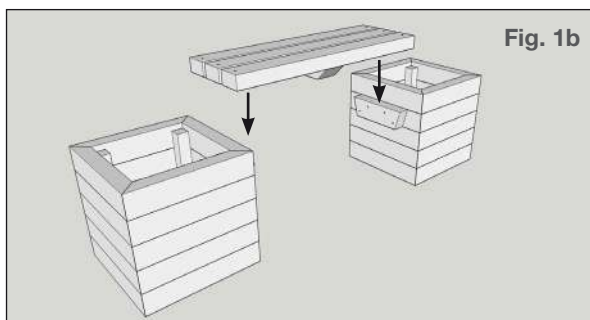


Fig. 1b

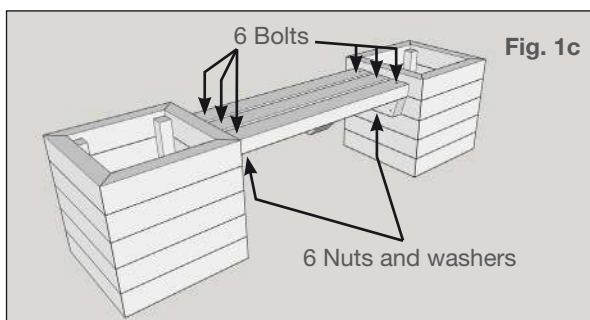


Fig. 1c

### Trough Version:

#### Items Supplied

- Assembly instructions
- 2 x planter boxes
- 1 x trough
- 4 x screws

#### Tools Required (not supplied)

- Screwdriver

#### Instructions

1. Place the two planters 1m apart with the trough supports on the sides of the planters facing each other. (Fig. 2a)
2. Lower the trough into position (Fig. 2b) and insert the four screws provided into the pilot holes at each end and screw together. (Fig. 2c)

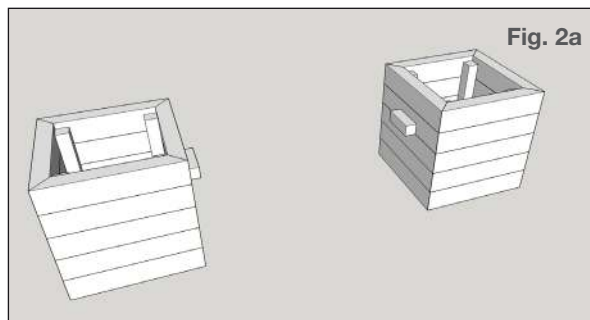


Fig. 2a

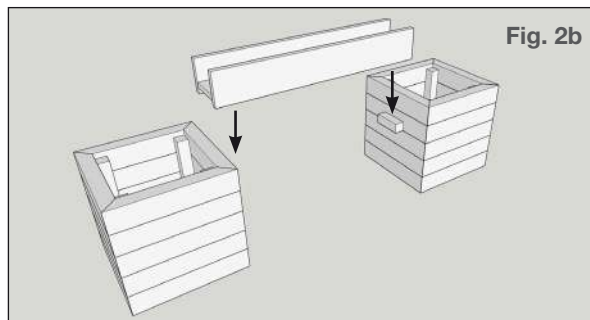


Fig. 2b

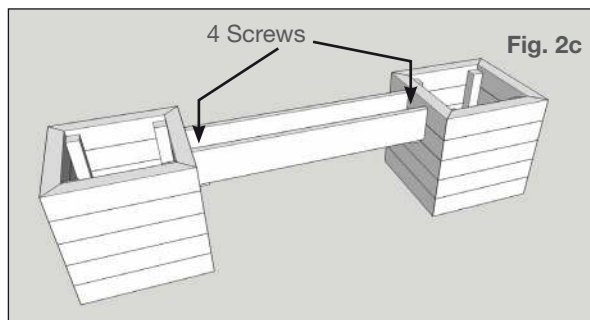


Fig. 2c